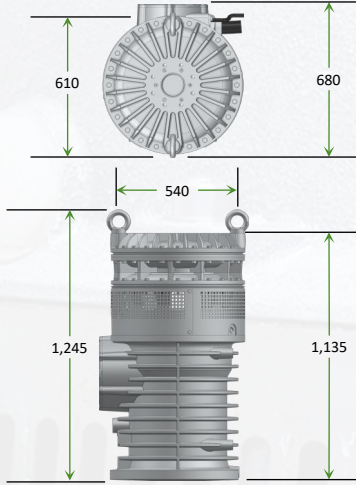
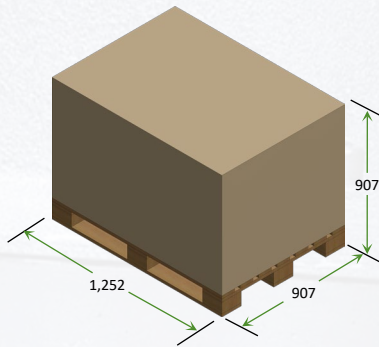
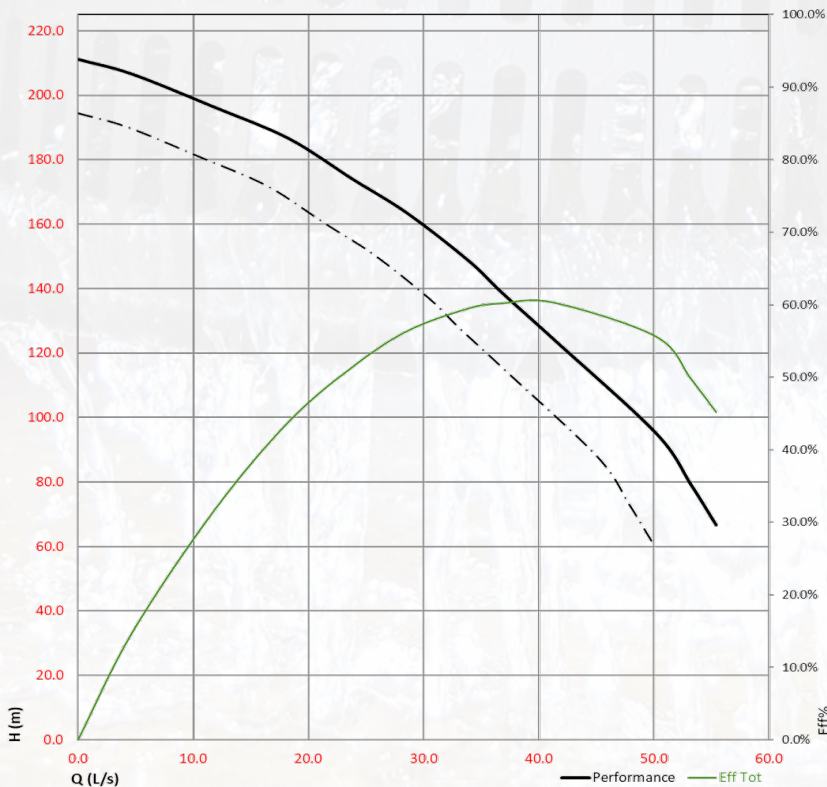
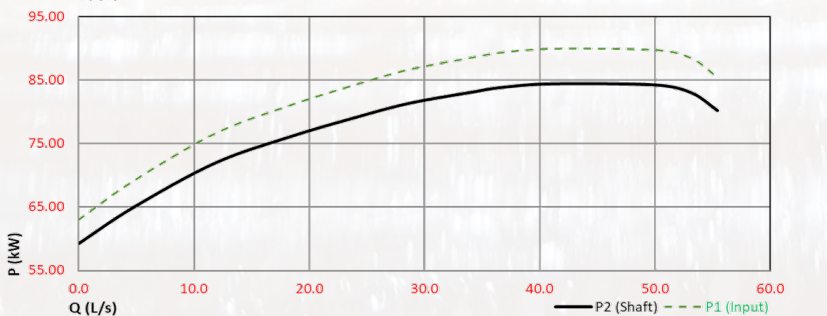
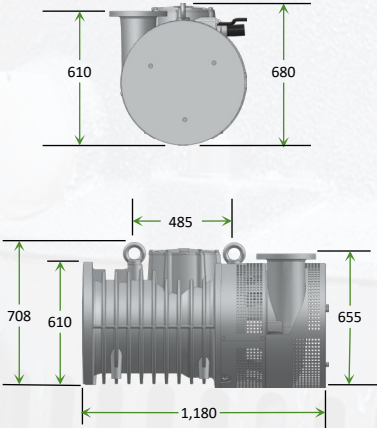
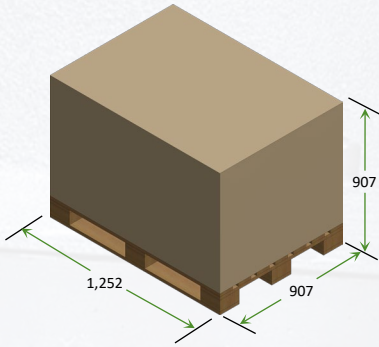
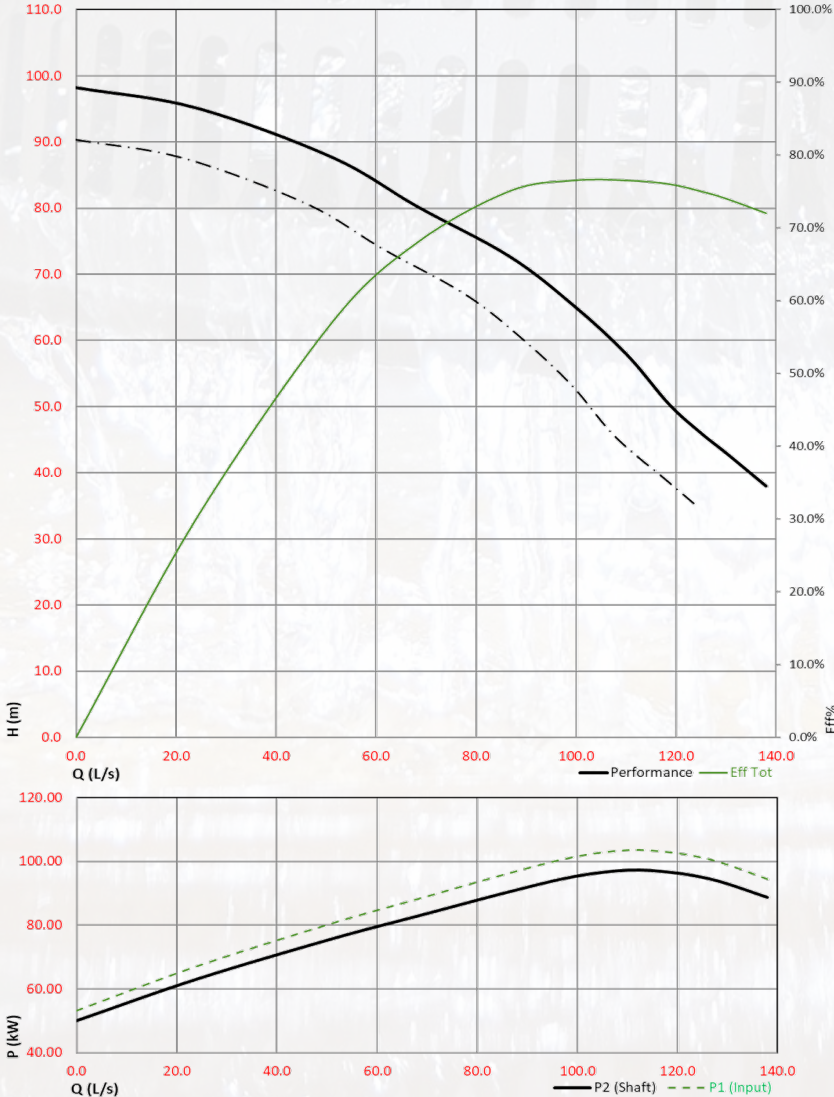


DATA SHEET MTP090KW HH 50HZ

DIMENSIONS		MOTOR SPECIFICATIONS																																																				
Pump only (mm)	Pump packaged (mm)																																																					
																																																						
Weight: 984kg	Weight: 995kg																																																					
PUMP PERFORMANCE		PUMP SPECIFICATIONS																																																				
		<table><tr><td>Rated power</td><td colspan="2">90kW</td></tr><tr><td>Full load output power</td><td colspan="2">89.8kW</td></tr><tr><td>Full load input power</td><td colspan="2">95.6kW</td></tr><tr><td>Rotational speed</td><td colspan="2">2,958 rpm</td></tr><tr><td>Power factor</td><td colspan="2">0.923</td></tr><tr><td>Motor efficiency</td><td colspan="2">93.9 %</td></tr><tr><td>Pump efficiency</td><td colspan="2">60.2 %</td></tr><tr><td>Overall efficiency</td><td colspan="2">56.6 %</td></tr><tr><td>Voltage</td><td>Full Load Current (A)</td><td>Resist Ω*</td></tr><tr><td>380V (Δ)</td><td>176.58</td><td>0.0461</td></tr><tr><td>400V (Δ)</td><td>167.75</td><td>0.0572</td></tr><tr><td>415V (Δ)</td><td>161.69</td><td>0.0623</td></tr><tr><td>440V (Δ)</td><td>152.50</td><td>0.0678</td></tr><tr><td>500V (Δ)</td><td>134.20</td><td>0.0796</td></tr><tr><td>525V (Δ)</td><td>127.81</td><td>0.0935</td></tr><tr><td>550V (Δ)</td><td>122.00</td><td>0.1040</td></tr><tr><td>1000V (Y)</td><td>67.10</td><td>0.1087</td></tr></table>		Rated power	90kW		Full load output power	89.8kW		Full load input power	95.6kW		Rotational speed	2,958 rpm		Power factor	0.923		Motor efficiency	93.9 %		Pump efficiency	60.2 %		Overall efficiency	56.6 %		Voltage	Full Load Current (A)	Resist Ω*	380V (Δ)	176.58	0.0461	400V (Δ)	167.75	0.0572	415V (Δ)	161.69	0.0623	440V (Δ)	152.50	0.0678	500V (Δ)	134.20	0.0796	525V (Δ)	127.81	0.0935	550V (Δ)	122.00	0.1040	1000V (Y)	67.10	0.1087
Rated power	90kW																																																					
Full load output power	89.8kW																																																					
Full load input power	95.6kW																																																					
Rotational speed	2,958 rpm																																																					
Power factor	0.923																																																					
Motor efficiency	93.9 %																																																					
Pump efficiency	60.2 %																																																					
Overall efficiency	56.6 %																																																					
Voltage	Full Load Current (A)	Resist Ω*																																																				
380V (Δ)	176.58	0.0461																																																				
400V (Δ)	167.75	0.0572																																																				
415V (Δ)	161.69	0.0623																																																				
440V (Δ)	152.50	0.0678																																																				
500V (Δ)	134.20	0.0796																																																				
525V (Δ)	127.81	0.0935																																																				
550V (Δ)	122.00	0.1040																																																				
1000V (Y)	67.10	0.1087																																																				
		*75°C @ 2KVDC/1min																																																				
		<table><tr><td>Motor type</td><td colspan="2">Submersible squirrel-cage induction</td></tr><tr><td>Pump type</td><td colspan="2">Submersible centrifugal</td></tr><tr><td>Ingress Protection Rating</td><td colspan="2">IP68</td></tr><tr><td>Insulation Class</td><td colspan="2">Class H (IEC 85)</td></tr><tr><td>Motor protection</td><td colspan="2">Stator thermistors in series</td></tr><tr><td>Earth protection</td><td colspan="2">Earth diode in series</td></tr><tr><td>Max allowable consecutive restarts per hour</td><td colspan="2">15</td></tr><tr><td>Discharge connection (AUS Std)</td><td colspan="2">100mm EN1092-2-T11</td></tr><tr><td>Cable type (AUS Std)</td><td colspan="2">Type 241.1 screened mining 3G50+3XE+P</td></tr><tr><td>Cable length (AUS Std)</td><td colspan="2">15m</td></tr><tr><td>Zinc anodes</td><td colspan="2">Fitted as standard ex works</td></tr></table>		Motor type	Submersible squirrel-cage induction		Pump type	Submersible centrifugal		Ingress Protection Rating	IP68		Insulation Class	Class H (IEC 85)		Motor protection	Stator thermistors in series		Earth protection	Earth diode in series		Max allowable consecutive restarts per hour	15		Discharge connection (AUS Std)	100mm EN1092-2-T11		Cable type (AUS Std)	Type 241.1 screened mining 3G50+3XE+P		Cable length (AUS Std)	15m		Zinc anodes	Fitted as standard ex works																			
Motor type	Submersible squirrel-cage induction																																																					
Pump type	Submersible centrifugal																																																					
Ingress Protection Rating	IP68																																																					
Insulation Class	Class H (IEC 85)																																																					
Motor protection	Stator thermistors in series																																																					
Earth protection	Earth diode in series																																																					
Max allowable consecutive restarts per hour	15																																																					
Discharge connection (AUS Std)	100mm EN1092-2-T11																																																					
Cable type (AUS Std)	Type 241.1 screened mining 3G50+3XE+P																																																					
Cable length (AUS Std)	15m																																																					
Zinc anodes	Fitted as standard ex works																																																					
		MATERIAL SPECIFICATIONS																																																				
		Outer casing	Stator housing	EN1561 GJL-200 grey cast iron																																																		
		Bearing housing	Oil housing																																																			
		Diffusers	Suction covers																																																			
		Oil housing	Diffusers	Co-polymer polyurethane wear protection																																																		
		Suction covers																																																				
		Impellers	Stainless steel																																																			
		Mechanical seals	316 Stainless steel / Viton + Tungsten / Silicon carbides																																																			
		Rotor shaft	Duplex Stainless steel																																																			
		O-rings	NBR + Hi-temp HNBR + Viton																																																			
		Strainer	316 Stainless steel																																																			
		APPLICATION SPECIFICATIONS																																																				
		Maximum submerged depth	75m																																																			
		Max liquid temperature	40°C																																																			
		Allowable pumped liquid pH	6-11																																																			
		Maximum liquid density	1,100 kgm³																																																			
		Maximum spherical solid Ø	10mm strainer hole																																																			

DATA SHEET MTP090KW HV 50HZ

DIMENSIONS		MOTOR SPECIFICATIONS																																																				
Pump only (mm)	Pump packaged (mm)																																																					
		<table><tr><td>Rated power</td><td colspan="2">90kW</td></tr><tr><td>Full load output power</td><td colspan="2">89.8kW</td></tr><tr><td>Full load input power</td><td colspan="2">95.6kW</td></tr><tr><td>Rotational speed</td><td colspan="2">2,958 rpm</td></tr><tr><td>Power factor</td><td colspan="2">0.923</td></tr><tr><td>Motor efficiency</td><td colspan="2">93.9 %</td></tr><tr><td>Pump efficiency</td><td colspan="2">77.2 %</td></tr><tr><td>Overall efficiency</td><td colspan="2">72.3 %</td></tr><tr><td>Voltage</td><td>Full Load Current (A)</td><td>Resist Ω*</td></tr><tr><td>380V (Δ)</td><td>176.58</td><td>0.0461</td></tr><tr><td>400V (Δ)</td><td>167.75</td><td>0.0572</td></tr><tr><td>415V (Δ)</td><td>161.69</td><td>0.0572</td></tr><tr><td>440V (Δ)</td><td>152.50</td><td>0.0678</td></tr><tr><td>500V (Δ)</td><td>134.20</td><td>0.0796</td></tr><tr><td>525V (Δ)</td><td>127.81</td><td>0.0935</td></tr><tr><td>550V (Δ)</td><td>122.00</td><td>0.1040</td></tr><tr><td>1000V (Y)</td><td>67.10</td><td>0.1087</td></tr></table>		Rated power	90kW		Full load output power	89.8kW		Full load input power	95.6kW		Rotational speed	2,958 rpm		Power factor	0.923		Motor efficiency	93.9 %		Pump efficiency	77.2 %		Overall efficiency	72.3 %		Voltage	Full Load Current (A)	Resist Ω*	380V (Δ)	176.58	0.0461	400V (Δ)	167.75	0.0572	415V (Δ)	161.69	0.0572	440V (Δ)	152.50	0.0678	500V (Δ)	134.20	0.0796	525V (Δ)	127.81	0.0935	550V (Δ)	122.00	0.1040	1000V (Y)	67.10	0.1087
Rated power	90kW																																																					
Full load output power	89.8kW																																																					
Full load input power	95.6kW																																																					
Rotational speed	2,958 rpm																																																					
Power factor	0.923																																																					
Motor efficiency	93.9 %																																																					
Pump efficiency	77.2 %																																																					
Overall efficiency	72.3 %																																																					
Voltage	Full Load Current (A)	Resist Ω*																																																				
380V (Δ)	176.58	0.0461																																																				
400V (Δ)	167.75	0.0572																																																				
415V (Δ)	161.69	0.0572																																																				
440V (Δ)	152.50	0.0678																																																				
500V (Δ)	134.20	0.0796																																																				
525V (Δ)	127.81	0.0935																																																				
550V (Δ)	122.00	0.1040																																																				
1000V (Y)	67.10	0.1087																																																				
Weight: 900kg	Weight: 915kg	*75°C @ 2KVDC/1min																																																				
PUMP PERFORMANCE		PUMP SPECIFICATIONS																																																				
		<table><tr><td>Motor type</td><td colspan="2">Submersible squirrel-cage induction</td></tr><tr><td>Pump type</td><td colspan="2">Submersible centrifugal</td></tr><tr><td>Ingress Protection Rating</td><td colspan="2">IP68</td></tr><tr><td>Insulation Class</td><td colspan="2">Class H (IEC 85)</td></tr><tr><td>Motor protection</td><td colspan="2">Stator thermistors in series</td></tr><tr><td>Earth protection</td><td colspan="2">Earth diode in series</td></tr><tr><td>Max allowable consecutive restarts per hour</td><td colspan="2">15</td></tr><tr><td>Discharge connection (AUS Std)</td><td colspan="2">150mm EN1092-2-T9</td></tr><tr><td>Cable type (AUS Std)</td><td colspan="2">Type 241.1 screened mining 3G50+3XE+P</td></tr><tr><td>Cable length (AUS Std)</td><td colspan="2">15m</td></tr><tr><td>Zinc anodes</td><td colspan="2">Fitted as standard ex works</td></tr></table>		Motor type	Submersible squirrel-cage induction		Pump type	Submersible centrifugal		Ingress Protection Rating	IP68		Insulation Class	Class H (IEC 85)		Motor protection	Stator thermistors in series		Earth protection	Earth diode in series		Max allowable consecutive restarts per hour	15		Discharge connection (AUS Std)	150mm EN1092-2-T9		Cable type (AUS Std)	Type 241.1 screened mining 3G50+3XE+P		Cable length (AUS Std)	15m		Zinc anodes	Fitted as standard ex works																			
Motor type	Submersible squirrel-cage induction																																																					
Pump type	Submersible centrifugal																																																					
Ingress Protection Rating	IP68																																																					
Insulation Class	Class H (IEC 85)																																																					
Motor protection	Stator thermistors in series																																																					
Earth protection	Earth diode in series																																																					
Max allowable consecutive restarts per hour	15																																																					
Discharge connection (AUS Std)	150mm EN1092-2-T9																																																					
Cable type (AUS Std)	Type 241.1 screened mining 3G50+3XE+P																																																					
Cable length (AUS Std)	15m																																																					
Zinc anodes	Fitted as standard ex works																																																					
		MATERIAL SPECIFICATIONS																																																				
		Outer casing	Stator housing	EN1561 GJL-200 grey cast iron																																																		
		Bearing housing	Oil housing																																																			
		Diffusers	Suction covers																																																			
		Oil housing	Diffusers	Co-polymer polyurethane wear protection																																																		
		Suction covers																																																				
		Impellers	Stainless steel																																																			
		Mechanical seals	316 Stainless steel / Viton + Tungsten / Silicon carbides																																																			
		Rotor shaft	Duplex Stainless steel																																																			
		O-rings	NBR + Hi-temp HNBR + Viton																																																			
		Strainer	316 Stainless steel																																																			
		APPLICATION SPECIFICATIONS																																																				
		Maximum submerged depth	75m																																																			
		Max liquid temperature	40°C																																																			
		Allowable pumped liquid pH	6-11																																																			
		Maximum liquid density	1,100 kgm³																																																			
		Maximum spherical solid Ø	10mm strainer hole																																																			